


1. Based on ASTM A 653 structural steel.
2. Values in row "S" are based on strength.
3. Values in row "D" are based on deflection of 1/180th span.
4. Web crippling not included in strength calculation. See example.
5. Limit States Design principles were used in accordance with CSA Standard S136-12.

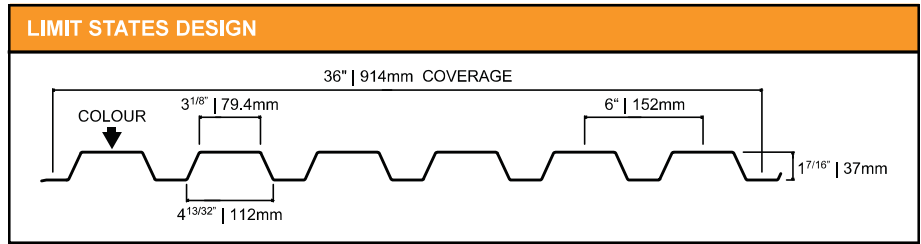

SECTION PROPERTIES | Per Foot of Width

Base Steel Thickness (inches)	Weight [G90] (psf)	Yield Stress (ksi)	Section Modulus		Deflection Moment of Inertia (in ⁴)	Specified Web Crippling Data			
			Midspan (in ³)	Support (in ³)		Pe1 End (lb)	Pe2 End (lb)	Pi1 Interior (lb)	Pi1 Interior (lb)
0.0180	1.04	33	0.0847	0.0884	0.0754	62.1	15.5	119	20.2
0.0180	1.04	50	0.0778	0.0822	0.0707	94.1	23.5	180	30.5
0.0240	1.36	33	0.128	0.130	0.114	116	29.1	222	37.7
0.0300	1.69	33	0.175	0.176	0.152	188	47.1	359	61.0


LLF = 1.40; IMPF = 0.75; NORMAL OCCUPANCY = 1.0

LOAD TABLE | Maximum Uniformly Distributed Specified Loads (psf).

Span Length (ft)		1-Span Base Steel Thickness (inches)				2-Span Base Steel Thickness (inches)				3-Span Base Steel Thickness (inches)				
		0.0180	0.0180	0.0240	0.0300	0.0180	0.0180	0.0240	0.0300	0.0135	0.0180	0.0240	0.0300	
Y.S.* (ksi)		33	50	33	33									
4.0	S	75	104	113	154									
4.0	D	137	128	207	276									
4.5	S	59	82	89	122									
4.5	D	96	90	145	194									
5.0	S	48	67	72	99									
5.0	D	70	66	106	141									
5.5	S	40	55	60	82									
5.5	D	53	49	80	106									
6.0	S	33	46	50	69									
6.0	D	41	38	61	82									
6.5	S	28	39	43	58									
6.5	D	32	30	48	64									
7.0	S	24	34	37	50									
7.0	D	26	24	39	51									
7.5	S	21	30	32	44									
7.5	D	21	19	31	42									
8.0	S	19	26	28	39									
8.0	D	17	16	26	34									
8.5	S	17	23	25	34									
8.5	D	14	13	22	29									
9.0	S	15	21	22	30									
9.0	D	12	11	18	24									
9.5	S	13	18	20	27									
9.5	D	10	10	15	21									
10.0	S	12	17	18	25									
10.0	D	9	8	13	18									

*Y.S. = Yield Strength

1. Based on ASTM A 653 structural steel.
2. Values in row "S" are based on strength.
3. Values in row "D" are based on deflection of 1/180th span.
4. Web crippling not included in strength calculation. See example.
5. Limit States Design principles were used in accordance with CSA Standard S136-12.

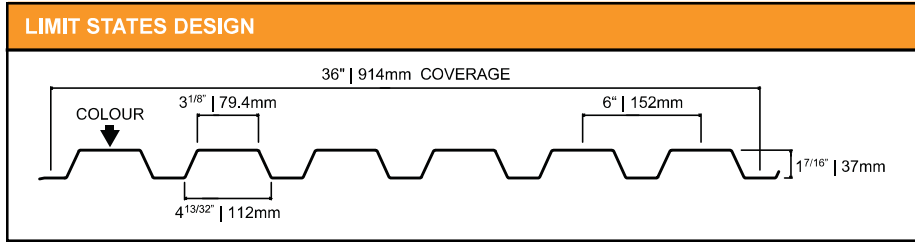

SECTION PROPERTIES Per Metre of Width									
Base Steel Thickness (mm)	Mass [Z275] (kg/m ²)	Yield Stress (MPa)	Section Modulus		Deflection Moment of Inertia (x10 ⁶ mm ⁴)	Specified Web Crippling Data			
			Midspan (x10 ³ mm ³)	Support (x10 ³ mm ³)		Pe1 End (kN)	Pe2 End (kN)	Pi1 Interior (kN)	Pi1 Interior (kN)
0.457	5.06	230	4.54	4.74	0.103	0.916	0.229	1.75	0.297
0.457	5.06	345	4.18	4.42	0.0965	1.37	0.344	2.62	0.446
0.610	6.66	230	6.87	7.00	0.155	1.72	0.429	3.27	0.556
0.762	8.26	230	9.37	9.43	0.207	2.78	0.695	5.29	0.900

LLF = 1.40; IMPF = 0.75; NORMAL OCCUPANCY = 1.0

LOAD TABLE Maximum Uniformly Distributed Specified Loads (kPa).													
Span Length (m)		1-Span Base Steel Thickness (mm)				2-Span Base Steel Thickness (mm)				3-Span Base Steel Thickness (mm)			
		0.457	0.457	0.610	0.762	0.457	0.457	0.610	0.762	0.457	0.457	0.610	0.762
Y.S.* (MPa)		230	345	230	230	230	345	230	230	230	345	230	230
1.0	S	5.37	7.42	8.13	11.1	5.61	7.84	8.28	11.2	7.01	9.80	10.4	14.0
1.0	D	11.9	11.2	17.9	23.9	28.5	26.8	43.1	57.3	22.4	21.1	33.9	45.2
1.2	S	3.73	5.15	5.64	7.70	3.90	5.45	5.75	7.75	4.87	6.81	7.18	9.68
1.2	D	6.87	6.45	10.4	13.8	16.5	15.5	24.9	33.2	13.0	12.2	19.6	26.1
1.4	S	2.74	3.78	4.15	5.66	2.86	4.00	4.22	5.69	3.58	5.00	5.28	7.12
1.4	D	4.32	4.06	6.54	8.71	10.4	9.75	15.7	20.9	8.17	7.68	12.4	16.5
1.6	S	2.10	2.90	3.17	4.33	2.19	3.06	3.23	4.36	2.74	3.83	4.04	5.45
1.6	D	2.90	2.72	4.38	5.83	6.95	6.53	10.5	14.0	5.47	5.14	8.28	11.0
1.8	S	1.66	2.29	2.51	3.42	1.73	2.42	2.55	3.44	2.16	3.03	3.19	4.30
1.8	D	2.03	1.91	3.08	4.10	4.88	4.59	7.38	9.83	3.85	3.61	5.81	7.74
2.0	S	1.34	1.85	2.03	2.77	1.40	1.96	2.07	2.79	1.75	2.45	2.59	3.49
2.0	D	1.48	1.39	2.24	2.99	3.56	3.34	5.38	7.17	2.80	2.63	4.24	5.64
2.2	S	1.11	1.53	1.68	2.29	1.16	1.62	1.71	2.31	1.45	2.03	2.14	2.88
2.2	D	1.11	1.05	1.68	2.24	2.67	2.51	4.04	5.39	2.11	1.98	3.18	4.24
2.4	S	0.93	1.29	1.41	1.92	0.97	1.36	1.44	1.94	1.22	1.70	1.80	2.42
2.4	D	0.86	0.81	1.30	1.73	2.06	1.94	3.11	4.15	1.62	1.52	2.45	3.27
2.6	S	0.79	1.10	1.20	1.64	0.83	1.16	1.22	1.65	1.04	1.45	1.53	2.06
2.6	D	0.68	0.63	1.02	1.36	1.62	1.52	2.45	3.26	1.28	1.20	1.93	2.57
2.8	S	0.69	0.95	1.04	1.41	0.72	1.00	1.06	1.42	0.89	1.25	1.32	1.78
2.8	D	0.54	0.51	0.82	1.09	1.30	1.22	1.96	2.61	1.02	0.96	1.54	2.06
3.0	S	0.60	0.82	0.90	1.23	0.62	0.87	0.92	1.24	0.78	1.09	1.15	1.55
3.0	D	0.44	0.41	0.66	0.88	1.05	0.99	1.59	2.12	0.83	0.78	1.26	1.67

*Y.S. = Yield Strength