


In order to minimize the potential for oil canning;

Westman Steel ONLY recommends 22ga for wall application - lengths less than 12' (3660mm) for profiles with no V Groove and a maximum length of 30' (9144mm) for profiles with V Groove.

Profile variations are available, see reverse.

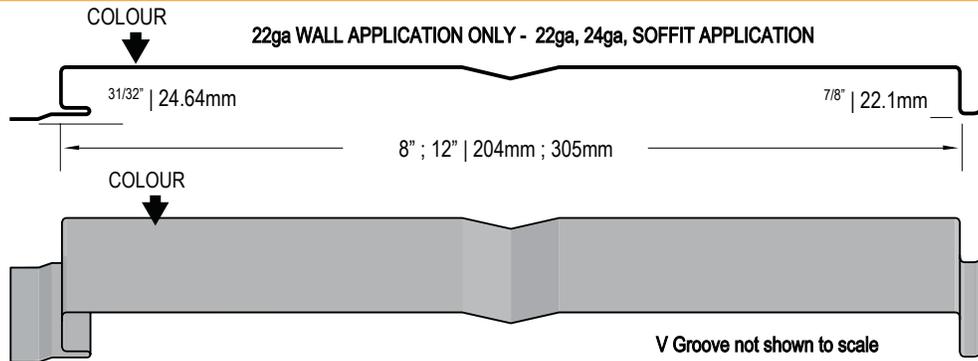

The steel used to manufacture WS200/WS300 sheets, meets or exceeds the following specifications and reference standards:

**ASTM A792/A792M**, 55% Aluminum-Zinc Alloy-Coated (Galvalume) Steel Sheet with coating designation AZM150 [AZ50] for Painted Galvalume and Plain Galvalume sheets.

**ASTM A653/A653M**, Zinc-Coated (Galvanized) Steel Sheet with coating designation Z275 [G90] for Plain Galvanized sheets.

**CSSBI 20M-17**, Standard for Sheet Steel Cladding for Architectural, Industrial and Commercial Building Applications.

**CSSBI S8-2018**, Quality and Performance Specification for Prefinished Sheet Steel Used for Building Products.

**CSA-S136-16**, North American Specification for the Design of Cold-Formed Steel Structural Members.

Classic/Comm	Colour Code	Gauge(s)			Classic/Comm	Colour Code	Gauge(s)			Classic/Comm	Colour Code	Gauge(s)		
		24	22				24	22				24	22	
Antique Linen	8696	•			Deep Water Green	8684				Metro Brown	8228	•		
Black	8262	•	•		Galvalume	2	•	•		Pacific Turquoise	8258			
Bone White	8273	•	•		Galvanized	1		•		Regent Grey	8730	•	•	
Bright Red	8386	•	•		Gold	8276	•			Royal Blue	8790			
Bright White	8783				Heron Blue	8330	•	•		Sapphire Blue	8261			
Buckskin	9202	•			Hickory Moss	9368				Slate Blue	8260	•	•	
Burgundy	8011				Int'l Orange	8234				Stone Grey	8305		•	
Cambridge White	8695	•	•		Iron Ore	8614	•			Tan	8315	•		
Charcoal	8306	•	•		Ivory	8802				Tile Red	8259			
Coffee	8326	•			Light Stone	9367				Whistler Green	8093			
Dark Brown	8229	•	•		Medium Green	8329				White White	8317	•	•	
Dark Red	8250				Melcher's Green	8307	•							

Textured	Colour Code	24	22	Textured	Colour Code	24	22	Exotic	Colour Code	24	22
Chocolate Brown	6034			Jet Black	6039			Copper Penny	2005	•	
Chrome Green	6037			Oxide Red	6042			Dark Zinc	1430	•	
Graphite Grey	6035			Sepia Brown	6041			Rustic Red	1426	•	


Wood Grain	Colour Code	24	22	Wood Grain	Colour Code	24	22
Frontier Espresso	4100	•	•	Frontier Cedar	4101	•	•

Product Description	Grade(s)	lbs./Lin. Ft.	Additional Information
24 Gauge Plain Galvalume	33	Inquire per gauge/coverage	<p><b>Please contact your nearest location for availability and minimum/maximum lengths.</b></p> <p><b>Extended lead time may be required.</b></p> <p><b>See Westman Steel Colour Chart for complete range. Contact for custom colour &amp; specialty coating option.</b></p>
24 Gauge Coloured	33		
22 Gauge Plain Galvanized	33		
22 Gauge Plain Galvalume	33		
22 Gauge Coloured	33		

Colour availability can vary by branch and may result in longer lead times.  
 Additional crating and freight charges may apply.




**WS200 | WS300 Flat**

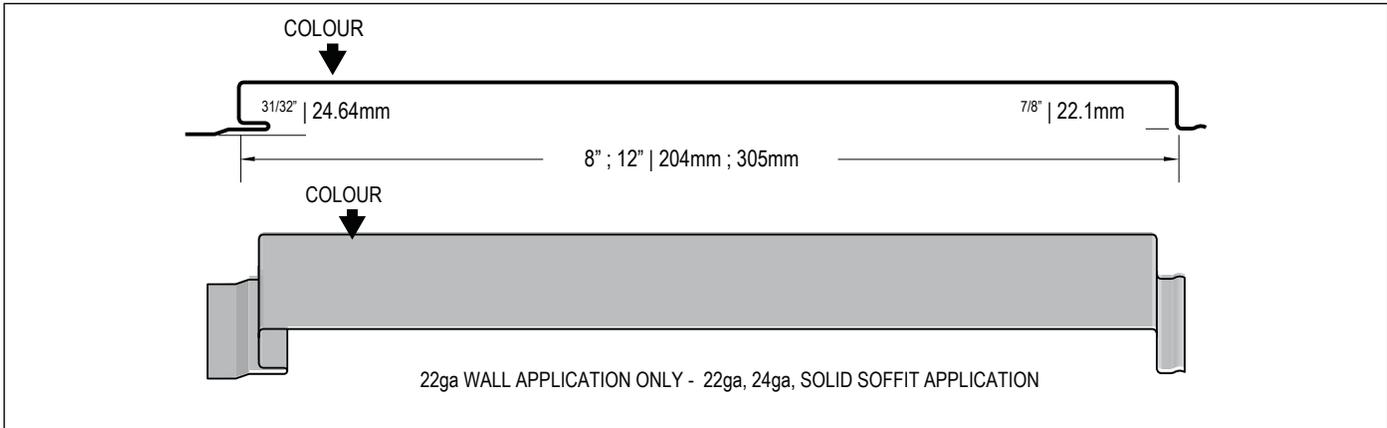


Westman Steel recommends lengths less than 12' (3660mm) for profiles with no V Groove to lessen possible oil can effect.

**WS200 | WS300 Flat with Perforations | WS200 ONE middle row 3.5% O/A | WS300 5% O/A**

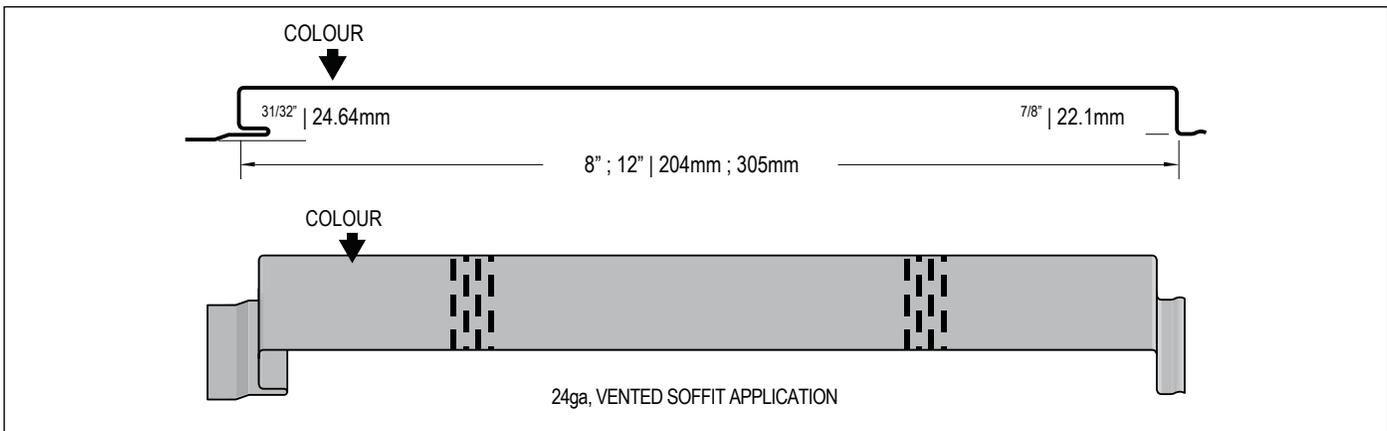

Perforations not shown to scale.

**WS300 with V Groove and Perforations | WS300 5% O/A**

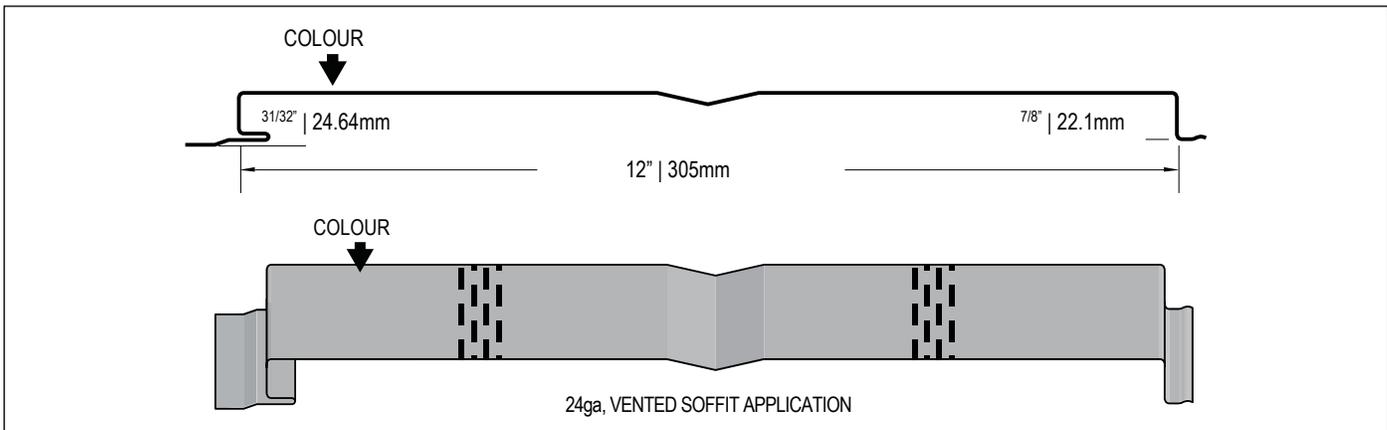


V Groove & Perforations not shown to scale.

Colour availability can vary by branch and may result in longer lead times.  
Additional crating and freight charges may apply.

In order to minimize the potential for oil canning;

Westman Steel ONLY recommends 22ga for wall application - lengths less than 12' (3660mm) for profiles with no V Groove and a maximum length of 30' (9144mm) for profiles with V Groove.

Profile variations are available, see reverse.

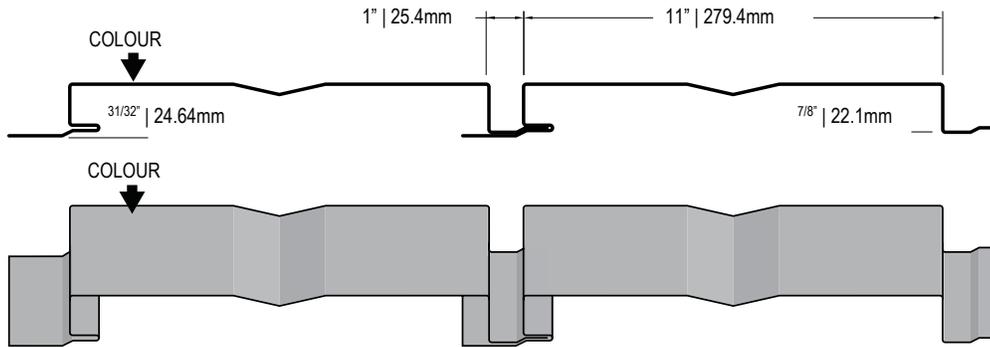

The steel used to manufacture WS279 sheets, meets or exceeds the following specifications and reference standards:

**ASTM A792/A792M**, 55% Aluminum-Zinc Alloy-Coated (Galvalume) Steel Sheet with coating designation AZM150 [AZ50] for Painted Galvalume and Plain Galvalume sheets.

**ASTM A653/A653M**, Zinc-Coated (Galvanized) Steel Sheet with coating designation Z275 [G90] for Plain Galvanized sheets.

**CSSBI 20M-17**, Standard for Sheet Steel Cladding for Architectural, Industrial and Commercial Building Applications.

**CSSBI S8-2018**, Quality and Performance Specification for Prefinished Sheet Steel Used for Building Products.

**CSA-S136-16**, North American Specification for the Design of Cold-Formed Steel Structural Members.

Classic/Comm	Colour Code	Gauge(s)			Classic/Comm	Colour Code	Gauge(s)			Classic/Comm	Colour Code	Gauge(s)		
		24	22				24	22				24	22	
Antique Linen	8696	•			Deep Water Green	8684				Metro Brown	8228	•		
Black	8262	•	•		Galvalume	2	•	•		Pacific Turquoise	8258			
Bone White	8273	•	•		Galvanized	1		•		Regent Grey	8730	•	•	
Bright Red	8386	•	•		Gold	8276	•			Royal Blue	8790			
Bright White	8783				Heron Blue	8330	•	•		Sapphire Blue	8261			
Buckskin	9202	•			Hickory Moss	9368				Slate Blue	8260	•	•	
Burgundy	8011				Int'l Orange	8234				Stone Grey	8305		•	
Cambridge White	8695	•	•		Iron Ore	8614	•			Tan	8315	•		
Charcoal	8306	•	•		Ivory	8802				Tile Red	8259			
Coffee	8326	•			Light Stone	9367				Whistler Green	8093			
Dark Brown	8229	•	•		Medium Green	8329				White White	8317	•	•	
Dark Red	8250				Melcher's Green	8307	•							

Textured	Colour Code	24	22	
Chocolate Brown	6034			
Chrome Green	6037			
Graphite Grey	6035			

Textured	Colour Code	24	22	
Jet Black	6039			
Oxide Red	6042			
Sepia Brown	6041			


Exotic	Colour Code	24	22	
Copper Penny	2005	•		
Dark Zinc	1430	•		
Rustic Red	1426	•		
Silver Mist	8047	•		
Corten	9942	•		

Wood Grain	Colour Code	24	22	
Frontier Espresso	4100	•	•	

Wood Grain	Colour Code	24	22	
Frontier Cedar	4101	•	•	

Product Description	Grade(s)	lbs./Lin. Ft.	Additional Information
24 Gauge Plain Galvalume	33	Inquire per gauge/coverage	<p><b>Please contact your nearest location for availability and minimum/maximum lengths.</b></p> <p><b>Extended lead time may be required.</b></p> <p><b>See Westman Steel Colour Chart for complete range. Contact for custom colour &amp; specialty coating option.</b></p>
24 Gauge Coloured	33		
22 Gauge Plain Galvanized	33		
22 Gauge Plain Galvalume	33		
22 Gauge Coloured	33		

Colour availability can vary by branch and may result in longer lead times. Additional crating and freight charges may apply.

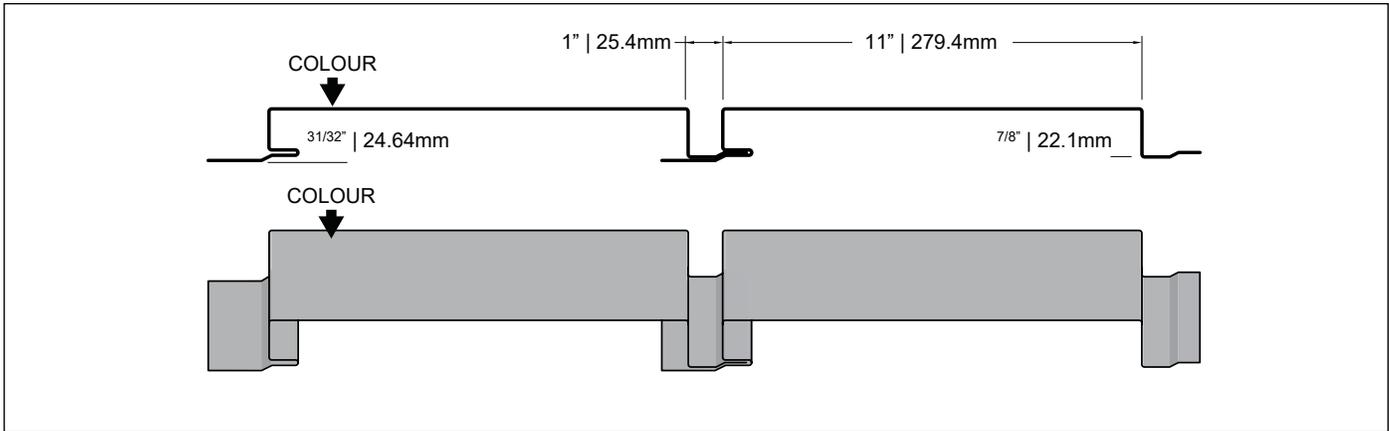

**Westman Steel recommends lengths less than 12' (3660mm) for profiles with no V Groove to lessen possible oil can effect.**